

Smartpack2 Controller

Monitoring and Control Unit

SMARTPACK JUST GOT SMARTER

- New and improved interface
- New and improved functionality
- Improved statistics
- Full hybrid support

Distributed control system for medium to large power systems.



SMARTPACK2 CONTROLLER

MONITORING AND CONTROL UNIT

Doc 242100.50X.DS3- rev4

PRODUCT DESCRIPTION

New features and look on a well-tested control platform

Smartpack2 is built on the proven software platform that is used in Smartpack, making it reliable and robust. Increased program memory and new hardware allows for more

features and improved user interface. The new modular distributed control system simplifies connections.

Applications

Minimize fuel consumption for off grid sites

Sites that run only on power from a generator often keep it running at a low load where most generators have low efficiency. Adding cyclic batteries and a Smartpack2 controlled power system, the Smartpack2 will run the generator in cyclic operation at its maximum efficiency. This will typically give a 55% reduction in fuel consumption. The total OPEX will be further decreased as the generator service will be less frequent due to it not running 24hours a day.

Hybrid telecom sites

Smartpack2 comes with advanced software to control power systems with multiple power sources. It handles solar energy and generators in combination with unstable grid. Smartpack2 is also prepared for wind power. It can be configured to automatically choose the smartest energy source at all times, and it can log the amount of energy produced by the various sources.

Simplifies operation in large multisite systems

Smartpack2 offers many offsite benefits if it is connected to the internet. View the system status, change parameters and receive alarms at a multisite management center. Use features such as battery lifetime estimations, fuel consumption through tank level measurement and generator runtime, to plan for site service. Use the energy logs to document the amount of renewable energy used, and to plan for site upgrades.

SMARTPACK2 DISTRIBUTED CONTROL SYSTEM

SMARTPACK2 ON-SITE - DISPLAY AND MENUS FOR EASY ACCESS TO STATUS AND COMPLETE CONFIGURATION.

No PC to hook on to the controller - no problem!

- Key system status parameters displayed by default: alarms, battery voltage, rectifier current and load current.
- Single key-hit to display list of triggered alarms.
- All configurations and setup available from the menus.
- High resolution and contrast - excellent reading and able to show complex content.
- Multilanguage (changeable "on the fly"): English, Chinese Simp., Chinese Trad., Russian, Norwegian and pending languages: Finish, French, German, Greek, Italian, Polish, Portuguese, Spanish, Swedish and Turkish.
- Disable external alarms while servicing.
- Access control - pin code to change configuration

Setup data and logs - bring your SD card.

- Convenient storage - for backup and transportation.
- Easy and robust to roll out a set of systems with identical setup.

KEY FEATURES

- **SCREEN**
Graphical TFT high contrast, high resolution color display for easy navigation in user menu
- **LEDS FOR LOCAL VISUAL ALARMS**
(Major, Minor, Power ON)
- **ETHERNET**
for remote or local monitoring and control via WEB Browser Ethernet port with HP Auto MDI/MDI-X for detection and correction for straight-through and crossover cables.
- **SNMP PROTOCOL**
with TRAP, SET and GET on Ethernet. Email of TRAP alarms
- **6 PROGRAMMABLE RELAY OUTPUTS**
for "traditional" remote monitoring. Expandable with I/O Monitor CAN Nodes.
- **6 PROGRAMMABLE MULTIPURPOSE INPUTS**
("digital inputs" or analog signals). Expandable with I/O Monitor CANNodes.
- **COMPREHENSIVE LOGGING**
- **BACKUP OF CRITICAL CONTROL FEATURES IN BASIC UNIT.**
- **AUTOMATIC BATTERY MONITORING AND TEST**
- **BATTERY LIFETIME INDICATION**
- **BATTERY USED AND REMAINING CAPACITY (AH OR %)**
- **MONITORING**
- **USER DEFINED ALARM GROUPING**
(boolean logic for grouped alarms)
- **UPLOADING AND DOWNLOADING OF CONFIGURATION FILES WITH SD CARD OR POWERSUITE**
(Windows™ application).
- **SD CARD SLOT FOR DOWNLOADING/UPLOADING OF LOGS AND SETUP**
- **COMPREHENSIVE GENERATOR/HYBRID/DC SOLAR SYSTEM CONTROL AND MONITORING FEATURES**

Event log: scroll through all events to get a quick overview of system history.

System configuration: all parameters are editable from the menu.



Main menu: easy task oriented layout and self explanatory navigation.

Smartpack2 Master



CAN BUS FOR POWER AND INTERNAL COMMUNICATION

SMARTPACK2 DISTRIBUTED CONTROL SYSTEM


SMARTPACK2 REMOTE - WEBPOWER WEB ACCESS

EASY TO USE, MORE INFORMATION AND CONTROL.

Through the internet or on-site directly from PC!

- System overview with status as "home page".
- Graphs show changes over time of various system variables.
- Configure alarm limits and all other parameters through self explanatory symbols and menus.
- Secure; access control and optional SSL.
- Download logs (event, energy, generator, battery,...)

WebPower: status page

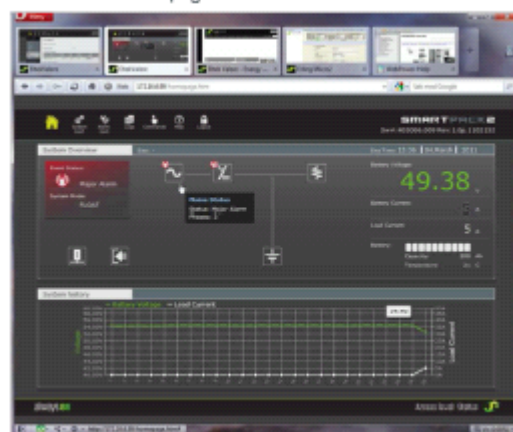

SMARTPACK2 DISTRIBUTED CONTROL SYSTEM

SMARTPACK2 SYSTEM BUILDING BLOCKS

Three units are required to build a complete Smartpack2 control system.

- Smartpack2 Master is the master controller and visible part of the system.
- Smartpack2 Basic handles housekeeping.
- IO Monitor Type2 handles external inputs and outputs.

The system can be expanded with several Basic, I/O units and other CAN nodes in the Smartpack family, all connected via the CAN bus.

THE SMARTPACK2 BASIC UNIT

- Sits inside the system – only available to service personnel.
- Powers all control units attached to the CAN bus.
- Handles LVD control.
- Takes control of critical system function in case of a Master Controller failure.
- Short of CAN power or LVD control – add more Basic units.



SMARTPACK2 DISTRIBUTED CONTROL SYSTEM



CONTROL FEATURES

- Output Voltage Measurement
- Load Current Calculation
- Energy Calculation
- Load/Battery Disconnect
- Real Time Clock with Battery Backup
- Stored Site Text/ID and Messages
- Position (long/lat) for auto placement
- Test of Relay Outputs
- Alarm grouping of events for relay outputs
- Battery Current Measurement
- Battery Temperature Measurement
- Battery Testing (acc. to discharge table or set time limit)
- Setup of Battery Data/Table
- Battery Capacity Indication
- Battery Boost Charging
 - Auto – Ah discharge or voltage threshold
 - Interval or Manual
- Temperature Compensated Charging
- Charge Current Limitation
- Battery Low Voltage Disconnect
 - Temperature dependent (optional)
 - Mains independent (optional)
- Available information about each rectifier, e.g. serial number, version, internal temperature
- Individual Rectifier Current Measurement
- Individual Rectifier Input Voltage
- Efficiency Management
- Emergency Voltage
- Startup delay
- Detailed internal alarms summary
- On/Off control for cyclic charging and fuel reduction
- Start-up delay of power system
- Fuel consumption logging and alarming based on tank level measurement
- Discharge cycle counter/Generator run hour logging
- DoD [%] logging w/time stamp

ALARMS/EVENTS AVAILABLE

Alarms can be set up with monitoring of minor and major levels. Hysteresis and time delay is user configurable. All average and peak levels on analogue values are auto logged in Event log

- AC Mains Low (2-level)
- AC Phase Voltage x3 (2-level)
- “Digital” Inputs (programmable descriptions)
- Events trigger by inputs
- Load Disconnect
 - Voltage or Timer (from mains failure) based
 - Mains independent (optional)
- Load Fuse
- Load Current
- Battery Voltage (4-level, optional 8-level)
- Battery Temperature (2-level)
- Battery Used Capacity (2-level) [Ah or %]
- Battery Remaining Capacity (2-level) [Ah or %]
- Battery Fuse
- Symmetry Failure (2-level)
 - Only with BM Can Node
- Battery Quality after test (2-level)
- Battery Current (4-level)
- Battery Life Time (2-level) [from temperature log]
- Rectifier Failure (2-level)
- Rectifier Capacity (2-level)
- Rectifier Current (2-level)
- Rectifier Avg. Temperature (2-level)
- Rectifier Current Share (2-level)

SPECIFICATIONS - MASTER

Power Consumption

MTBF

Display

Ethernet Port

Removable media

SNMP

Web

Networking

Event log

Data log

Dimensions (WxHxD)

Max 4.5W

> 1 300 000 hours Telcordia SR-332 Issue I, method III (a) ($T_{\text{ambient}} : 25^{\circ}\text{C}$)

32k colour TFT – QVGA (320x240)

- 10/100 BASE-T
- HP Auto MDI/MDI-X

SD Card

v1, v2c, v3 (pending) GET, SET & TRAP

Webpower; XHTML 1, java script, SSL

SMTP Client and NTP Client.

10 500 time stamped events

10 000 time stamped values of 10

user defined monitoring points

156 x 72 x 38mm

6,4 x 3 x 1,6”

SMARTPACK2 DISTRIBUTED CONTROL SYSTEM



SPECIFICATIONS - BASIC

Input Voltage	20-172 VDC (20 -75 VDC***)
Power Consumption	Shutdown: < 18 VDC
Contactor Outputs	Max 1.5A
Configurable Inputs	Max 4.5A (3x LVD max loaded)
System Connections	3 x LVD control outputs
o Voltage Sense	3x NO/NC/Temperature: NTC probe
o Current Sense	
o Battery Fuse*	24V, 48V, 60V & 110V** systems
o Load Fuse*	0-20mV and 0-60mV range shunts
Ground fault	Battery fuse sense, Open/Closed
Max Basic nodes	Load fuse sense, Open/Closed, Pull- Up/Down, Diode Matrix
Dimensions (WxHxD)	Simple bridge circuit detection
	8 units on a single CAN-bus
	155 x 35 x 80mm
	6.4 x 1.4 x 3.3"

SPECIFICATIONS - I/O MONITOR (TYPE 2)

Configurable Inputs	6x NO/NC/Analog Voltage [0-75V]
Alarm Outputs	6x Relay-Dry/Form C
	[Max 75V/2A/60W]
Max I/O Monitors	14 units on a single CAN-bus
Power Consumption	Max 3.6W
Dimensions (WxHxD)	135.1 x 23.5 x 59mm
	5.3 x 0.9 x 2.3"

GENERAL SPECIFICATIONS - ALL UNITS

Temperature Range	-40 to +65°C (-40 to 140°F)
-------------------	-----------------------------

OPTIONAL CONTROL DEVICES/CAN NODES

242100.300	Battery Monitor
242100.301	Load Monitor
242100.304	I/O Monitor (Outdoor)
242100.306	I/O Monitor Type 3
242100.200	Smartnode RS232/485
242100.500	Smartpack2 Master
242100.501	Smartpack2 Basic
242100.502	I/O Monitor – Type 2

*Only Open/Closed for 110V **Basic ver. U1.3 ***Basic ver. 1.0 - 1.2
Doc 242100.50X.DS3- rev4

Specifications are subject to change without notice